


REMOVAL

1. REMOVE FRONT WHEEL
2. REMOVE FRONT SHOCK ABSORBER
(See page [SA-20](#))

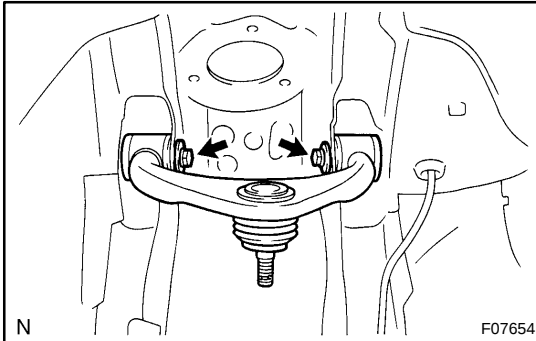

3. REMOVE UPPER SUSPENSION ARM
Remove the 2 bolts and upper suspension arm from the body.