

BRAKE PEDAL ON-VEHICLE INSPECTION

BROMK-07


1. CHECK PEDAL HEIGHT

Pedal height from asphalt sheet:

154 - 164 mm (6.063 - 6.457 in.)

2. IF NECESSARY, ADJUST PEDAL HEIGHT

- Remove the lower finish panel (See page [BO-135](#)).
 - Disconnect the connector from the stop light switch.
 - Loosen the stop light switch lock nut and remove the stop light switch.
 - Loosen the push rod lock nut.
 - Adjust the pedal height by turning the pedal push rod.
 - Tighten the push rod lock nut.
- Torque: 25 N·m (260 kgf·cm, 19 ft·lbf)**
- Install the stop light switch and turn it until it slightly contacts the pedal stopper.
 - Connect the connector to the stop light switch.
 - Push in the brake pedal 5 - 10 mm (0.20 - 0.39 in.), turn the stop light switch to lock the nut in a position where the stop light goes off.
 - After installation, push in the brake pedal 5 - 10 mm (0.20 - 0.39 in.), check that stop light lights up.
 - After adjusting the pedal height, check the pedal free play.
 - Install the lower finish panel (See page [BO-135](#)).

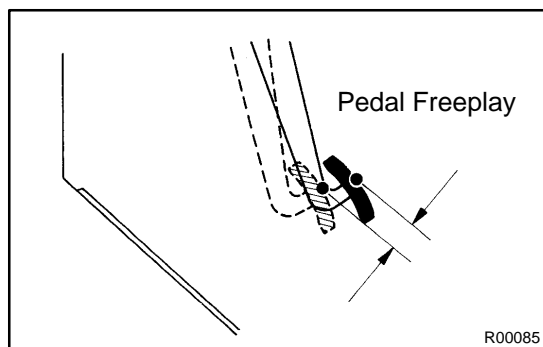

3. CHECK PEDAL FREE PLAY

- Stop the engine and depress the brake pedal several times until there is no more vacuum left in the booster.
- Push in the pedal by hand until the resistance begins to be felt, then measure the distance.

Pedal free play: 1 - 6 mm (0.04 - 0.24 in.)


HINT:

The freeplay to the 1st resistance is due to the play between the clevis and pin. This is magnified up to 2.0 - 4.5 mm (0.08 - 0.18 in.) at the pedal.

If incorrect, check the stop light switch clearance. If the clearance is OK, then troubleshoot the brake system.

Stop light switch clearance:

1.5 - 2.5 mm (0.059 - 0.098 in.)

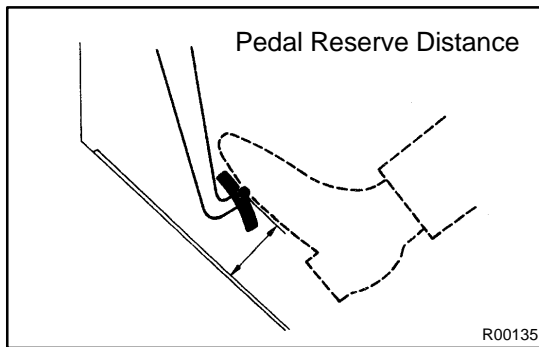

4. CHECK PEDAL RESERVE DISTANCE

Release the parking brake lever.

With the engine running, depress the pedal and measure the pedal reserve distance, as shown.

Pedal reserve distance from asphalt sheet at 490 N (50 Kgf, 110.2 lbf): More than 99 mm (3.90 in.)

If the reserve distance is incorrect, troubleshoot the brake system.