


REASSEMBLY

1. **INSTALL BLEEDER PLUG AND CAP**
Torque: 10.7 N·m (109 kgf·cm, 8 ft·lbf)

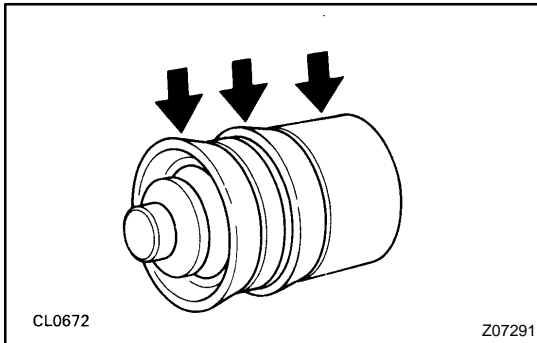

2. **COAT PISTON WITH LITHIUM SOAP BASE GLYCOL GREASE, AS SHOWN**
3. **INSTALL PISTON WITH SPRING INTO CYLINDER**
4. **INSTALL BOOT WITH PUSH ROD TO CYLINDER**